

APPEARANCE® 25

High Solids Floor Finish

PRODUCT DESCRIPTION:

Appearance® 25 is a high solids floor finish that rapidly builds gloss with minimal coats. This acrylized formulation produces a clear, color-free, high-gloss finish that requires little maintenance. **Appearance® 25** produces a star-like shine when burnished. For use on vinyl composition, vinyl, rubber, asphalt, concrete, terrazzo, linoleum, rubber and sealed wood floors.

FEATURES:

Durable:

Exceptional resistance to heel marking, scuffing and repeated scrubbing with detergents means that **Appearance® 25** outwears conventional finishes. Both stripping and recoating cycles are extended, lowering the frequency of these costly procedures.

Superior Soil Resistance:

The tough film of **Appearance® 25** minimizes soil penetration and surface abrasion even under extreme conditions. Autoscrubbing easily picks up dirt, immediately restoring the shine.

High Solids Formula:

Maximum labor productivity is assured as gloss builds quickly, with fewer coats.

Versatility:

Maintain **Appearance® 25** using many recognized methods, spray buff, top coat or scrub/recoat.

PRODUCT SPECIFICATIONS:

pH	9.0 ± 0.3
Appearance	Off White Emulsion
Fragrance	Mild polymeric
Freezing Point	About 32°F
% Non-Volatile Solids	25.0 +/- 0.5
% Total Solids	30.8
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None to Boiling
Coverage	1800 to 2200 sq. ft. per gallon
(may vary due to differences in porosity of the surface)	


INGREDIENTS:

Water	7732-18-5
Styrene acrylic polymers	Mixture
Diethylene glycol monoethyl ether	111-90-0
Tri-butoxyethyl phosphate	78-51-3
Polypropylene emulsion	Mixture

PRODUCT AVAILABILITY:

- 9651 4/1 gal.
- 9655 1/5 gal. pail
- 96555 1/55 gal. drum

END-USE-RATING




0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

APPEARANCE[®] 25

High Solids Floor Finish

USE INFORMATION: Recommended on all types of resilient and non-resilient floors which include vinyl composition, rubber, asphalt, quarry, terrazzo and sealed wood floors.

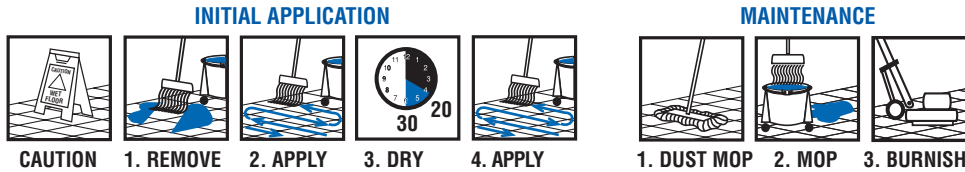

DIRECTIONS FOR USE:

INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Fullpro stripper and following label directions.
2. **APPLY** a thin coat of **Appearance[®] 25** using a clean finish mop.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** 2-3 coats for best results allowing for adequate drying time between each coat.

MAINTENANCE

1. **DUST MOP** the floor. Remove gum, labels, and other attached soil deposits with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Fullpro cleaner and following the label directions.
3. **BURNISH** the floor with a high speed machine and appropriate pad.

WARNING

May cause mild eye and skin irritation. Harmful to aquatic life.

Prevention

Avoid release to environment.

Response

Wash hands after handling.

Storage

Store away from incompatible materials.

Disposal

Dispose of contents / container in accordance with local / regional / national / international regulations.

KEEP OUT OF REACH OF CHILDREN

PERSONAL PROTECTION:

Respiratory Protection: Not needed under normal conditions.

Ventilation: Use with adequate ventilation.

Eye Protection: Safety glasses are optional.

Protective Gloves: Protective gloves are optional.

Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name: Not regulated by DOT.

Marine Pollutant: No



Floor Coating and Finishing Material
AS TO SLIP RESISTANCE ONLY 8P88

FULLER COMMERCIAL PRODUCTS

One Fuller Way
Great Bend, KS 67530
United States
www.fullercommercial.com

Customer Service (800) 848-4901
CHEMTREC (800) 424-9300
Emergency (620) 792-1711
24 Hour Emergency (800) 424-9300

965TDS-0115

DATA SHEET

FULLPRO
FULLER PROFESSIONAL